

## Altavoz de techo



### A-226DEN » 6" · 6 W · 100 dB · EN 54


Altavoz de techo de 6" para montaje empotrado de 6 W de potencia RMS en línea de 100 V, con rejilla metálica sin marco y cubierta trasera metálica. Instalación rápida mediante abrazaderas de resorte con tapas protectoras antivibraciones. Certificación EN 54-24.



## Especificaciones técnicas

|                             |                            |
|-----------------------------|----------------------------|
| Potencia RMS                | 6 W                        |
| Selección de potencia 100 V | 6 W, 3 W y 1,5 W           |
| Impedancia                  | 1,67 kΩ, 3,33 kΩ y 6,67 kΩ |
| Sensibilidad                | 92 dB SPL a 1 W IEC268-5   |
| Presión Acústica            | 100 dB SPL a 6 W IEC268-5  |
| Sensibilidad EN54-24        | 80 dB SPL a 1 W / 4 m      |
| Respuesta en frecuencia     | 56 ~ 18.000 Hz             |
| Cobertura 1kHz / 4kHz       | 175° / 90°                 |
| Temperatura de trabajo      | -10°C ~ +55°C              |
| Grado de protección         | IP21 / IK05                |
| Orificio a empotrar         | ø 188 mm                   |
| Dimensiones (mm)            | ø 220 x 107                |
| Peso                        | 1,40 kg                    |
| Acabado                     | Metálico, caja y rejilla   |
| Color                       | Blanco RAL 9016            |
| Normativa                   | EN54                       |

## Dimensiones

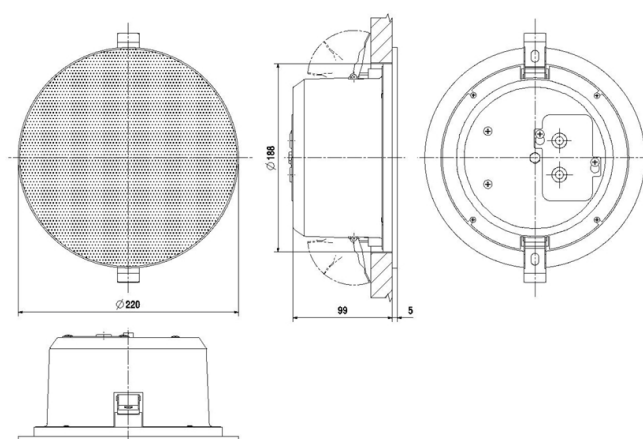

# LOUDSPEAKERS

## Ceiling speaker



### A-226DEN » 6" · 6 W · 100 dB · EN 54

6" ceiling loudspeaker for flush mounting with 6 W RMS power, 100 V line, with frameless metal grill and metal rear cover. Quick installation using spring clamps with anti-vibration protective caps. EN 54-24 certification.



## Technical specifications

|                        |                            |
|------------------------|----------------------------|
| Rated Power (RMS)      | 6 W                        |
| Power Taps             | 6 W, 3 W & 1.5 W           |
| Impedance              | 1.67 kΩ, 3.33 kΩ & 6.67 kΩ |
| Sensitivity            | 92 dB SPL at 1 W IEC268-5  |
| Sound Pressure         | 100 dB SPL at 6 W IEC268-5 |
| Sensitivity EN54-24    | 80 dB SPL at 1 W / 4 m     |
| Frequency Response     | 56 ~ 18,000 Hz             |
| Dispersion 1kHz / 4kHz | 175° / 90°                 |
| Temperature range      | -10°C ~ +55°C              |
| Protection degree      | IP21 / IK05                |
| Cutout Size            | ø 188 mm                   |
| Dimensions (mm)        | ø 220 x 107                |
| Weight                 | 1,40 kg                    |
| Finish                 | Metallic, box and grid     |
| Colour                 | White RAL 9016             |
| Standard               | EN54                       |

## Dimensions

