

INTERCOMUNICACIÓN IP-SIP

SIP


EP-42SIP

Intercomunicador antivándalo de intemperie con protocolo SIP, con audio bidireccional full duplex, cancelación de eco, reducción de ruido, servidor web, pulsador de llamada metálico, led indicador de llamada activa, control remoto para apertura de puerta y segundo contacto activo en comunicación o en llamada para integración con otros sistemas (seguridad, alarma, CCTV...). Alimentación 5 V CC o PoE.



FUNCIONES p2p

- Número de puntos sin limitación.
- Pulsador de llamada en puerta.
- Transferencia manual.
- Transferencia por tiempo de espera.
- Transferencia si ocupado.
- Llamada en espera (2 líneas).

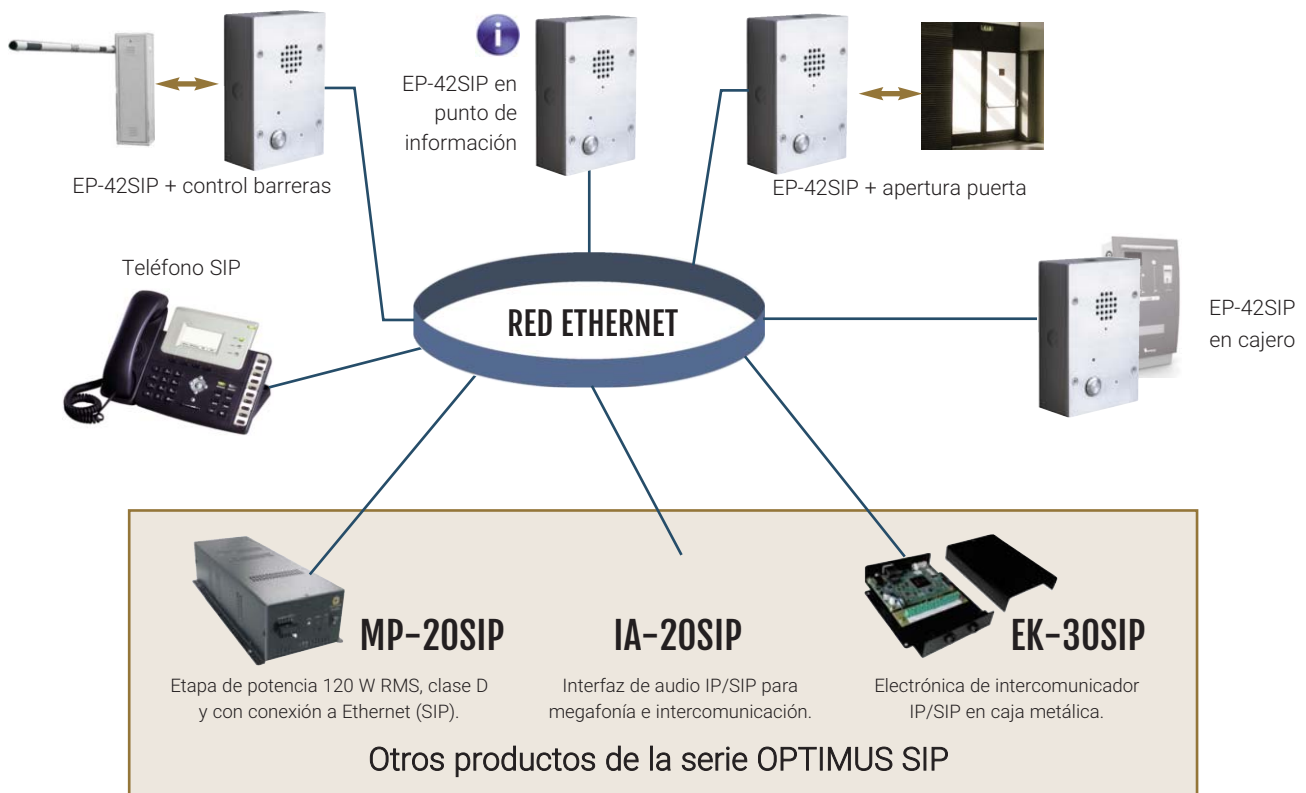

IP-SIP INTERCOMMUNICATION

SIP

EP-42SIP

Vandal-resistant weatherproof intercommunicator with SIP protocol, with full duplex two-way audio, echo cancellation, noise reduction, web server, metal call button, active call indicator led, remote control to open the door and second contact active in communication or call, for integration with other systems (security, alarm, CCTV...). 5 Vdc or PoE power supply.



p2p FUNCTIONS

- Unlimited number of points.
- Call button on the door.
- Manual transfer.
- Transfer due to time waiting.
- Transfer if busy.
- Call on hold (2 lines).

