


# Handset Intercom

MASTER SUB  
1 ▶ 3 AT-406

## Features


- Handset master-sub intercom w/2 additional subs (optional)
- Battery status LED
- Batteries or DC power supply
- Buzzer or bell activation (optional)

**Master station**




Master station

**Sub station**



**AT-306**  
Sub station

**Boxed set**




**AT-406**  
Boxed set (white color)

**AT-406B/A**  
Boxed set (charcoal gray)


**Power supply**  
**PS-0602C PS-0602DM SKK-620C** or Batteries → P.135

## Communication network

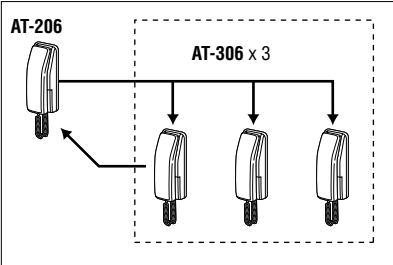


Master calls all the subs simultaneously, while the sub rings only the master.

## Unit dimensions



## Wiring

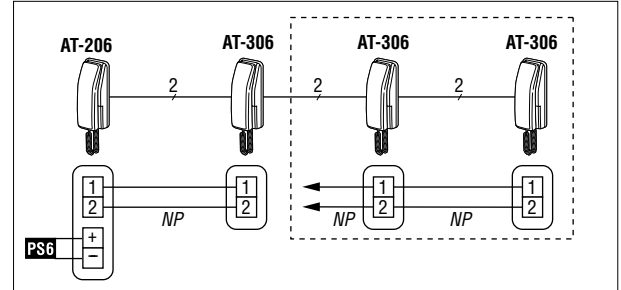

**PS6** : PS-0602C, PS-0602DM, SKK-620C

## Specifications (AT-406)

Power source	6V DC, 150mA
Power supply	PS-0602C, PS-0602DM, SKK-620C or Batteries "AA"(SUM-3) x 4 pcs
Communication	Press CALL button to ring all subs. Pick up any phone. Sub rings master only. Common talk.

Wiring	2 parallel wires. non-polarized
Wiring distance	2-station set 700m(0.65mm $\phi$ ) 1000m(0.8mm $\phi$ ) AT-206 to subs 1~3 400m(0.65mm $\phi$ ) 600m(0.8mm $\phi$ )

LE

DB

AT

YAZ

TD

IMU

TC

MC

NIM

NHX