

Central microfónica con pantalla táctil


DC-800ETH/T

Central de control con pantalla táctil y pupitre microfónico de sobremesa con conexión a Ethernet (IP) para el sistema OPTIMAX de megafonía y alarma por voz. Permite la emisión de mensajes a través de red IP en streaming, la activación de mensajes remotos de las matrices del sistema y la gestión de programas musicales y volúmenes.



- Audio Digital y control a través de IP (Layer 3 y 4).
- Conexión Ethernet. Redundancia opcional.
- Alimentación 24 V CC (alimentador no incluido).
- Se ejecuta el Software de control de megafonía (punto de avisos) con interfaz gráfica.
- Entrada posterior USB para la emisión de música ambiente.
- Display gráfico para mapa de bits de instalación con posibilidad de tener botones de asignación directa a mensajes.
- Botones para selección de zonas y/o grupos.
- Mensajes de viva voz o pregrabados.
- Supervisión de la instalación y sus alarmas.
- Modificación del volumen de las zonas.
- Indicación del estado de las zonas: Disponible, ocupada, prioridad q ue ocupa la zona...
- Avisos con/sin gong.
- Posibilidad de personalizar el gong.
- Grabación y emisión de pregrabados adhoc.
- Diferentes modos de operación: Modo normal PA y Modo Emergencia.
- Altavoz monitor.

Conexión	1 Ethernet (RJ45), ampliable a 2.
Alimentación	24 V DC
Consumo	0,5 A
Peso	2,5 kg
Color	Negro RAL9005
Micrófono	
Tipo	de condensador, unidireccional
Respuesta en frecuencia	50 ~ 12.000 Hz
Sensibilidad	1,78 mV
Impedancia	2,2 KΩ
Material	Aluminio
Longitud flexo	350 mm
Pantalla	
Tipo	LCD 7" PCAP
Resolución	1280 x 800 px
Luminancia	300 lux

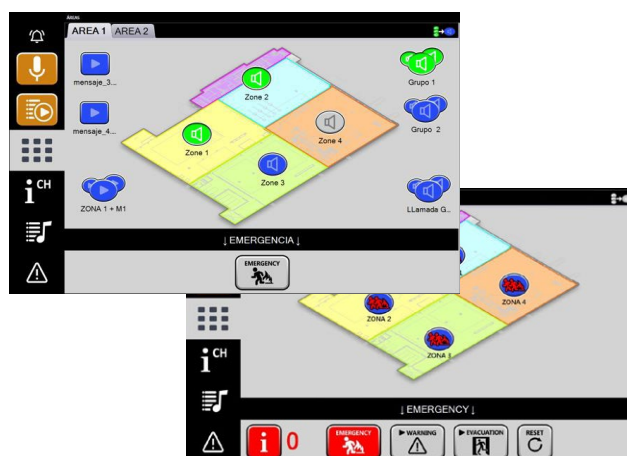

Microphone console with touch screen

DC-800ETH/T

Desktop control unit with touch screen and microphone desk with connection to Ethernet (IP) for the OPTIMAX public address system and voice alarm. It allows the emission of messages through the IP network in streaming, the activation of remote messages from the system matrices and the management of musical programs and volumes.



- Digital audio and IP control (Layers 3 and 4).
- Ethernet connection. Optional redundancy.
- 24V DC power supply (power adapter not included).
- Runs public address control software (announcement point) with a graphical interface.
- Rear USB input for background music playback.
- Graphic display for installation bitmap with the option of direct message assignment buttons.
 - Buttons for selecting zones and/or groups.
 - Live or pre-recorded messages.
 - Monitoring of the installation and its alarms.
 - Zone volume adjustment.
 - Zone status indication: Available, occupied, zone priority, etc.
- Announcements with/without gong.
- Customizable gong.
- Recording and playback of ad-hoc pre-recorded messages.
- Different operating modes: Normal PA mode and Emergency mode.
- Monitor speaker.

Connection	1 Ethernet (RJ45), expandable to 2
Power supply	24 V DC
Consumption	0.5 A
Weight	2.5 kg
Colour	Black RAL9005
Microphone	
Type	Uni-directional condenser
Frequency response	50 ~ 12,000 Hz
Sensitivity	1.78 mV
Impedance	2.2 KΩ
Material	Aluminio
Gooseneck Length	350 mm
Display	
Type	LCD 7" PCAP
Resolution	1280 x 800 px
Luminance	300 lux

