

PROYECTOR ACÚSTICO 20 W

SP-20EN


20 W

106 dB

Proyector acústico de 20 W RMS de potencia en línea de 100 V, con recinto cilíndrico de plástico ABS y rejilla metálica de aluminio.



Potencia RMS	20 W (30 W máx)
Altavoz	5"
Selección de potencia (W)	20, 10, 5 y 2,5 W
Conexión baja impedancia	8 ohm
Respuesta en frecuencia	150 ~ 20.000 Hz
SPL 1 m 1 kHz	92 dB (1 W) / 106 dB (20 W)
Ángulo de cobertura	167° (1 kHz) / 55° (4 kHz)
Margen de temperaturas	-30°C ~ +60°C
Protección	IP66 (IEC-529)
Dimensiones (mm)	203 (largo), 146 (boca)
Peso	2,0 kg
Acabados	ABS y aluminio, color blanco (RAL 9016)
Accesorios	soporte pared / techo
Normativa	Certificado EN 54-24 Cumple BS-5839, parte 8

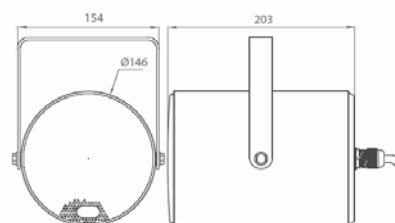

SP20EN_ES

C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300



OPTIMUS
SOUND & COMMUNICATION



ACOUSTIC PROJECTOR 20 W

SP-20EN

20 W

106 dB

A sound projector with a power of 20 W RMS in 100-V line with an ABS plastic enclosure and aluminium grille.



RMS power	20 W (30 W max)
Loudspeaker	5"
Power selection (W)	20, 10.5 and 2.5 W
Low impedance connection	8 Ohm
Frequency response	150 ~ 20,000 Hz
SPL 1 m 1 kHz	92 dB (1 W)/106 dB (20 W)
Dispersion angle	167° (1 kHz) / 55° (4 kHz)
Temperature range	-30°C ~ +60°C
Protection	IP66 (IEC-529)
Dimensions (mm)	203 (long), 146 (mouth)
Weight	2.0 Kg
Finishing	ABS and aluminium, ivory colour (RAL 9016)
Accessories	wall/ceiling bracket
Regulations	Certified EN 54-24 In compliance with BS-5839, p.8

