

Altavoz de techo para salas blancas

BK-560CR » 6 W · 8 Ω


Altavoz de techo de alta calidad especialmente diseñado para salas blancas, de 5", 6 W de potencia y conexión de 8 ohm. Se empotra en techo con un sistema de montaje rápido mediante abrazaderas de resorte. Se trata de un punto sonoro para uso general en cualquier tipo de instalación, aunque su diseño (materiales, construcción, robustez...) le hace especialmente adecuado en salas limpias (clean rooms), por ejemplo entornos de producción para microelectrónica, industria farmacéutica, estudios fotográficos, laboratorios...



Especificaciones técnicas

Potencia RMS	6 W
Impedancia	8 Ω
Respuesta en frecuencia	70 ~ 12.000 Hz
SPL 1 m, 1 kHz	88 dB (1 W) / 95 dB (6 W)
Dispersión (-6 dB)	150° (1 kHz) / 70° (4 kHz)
Temperatura de trabajo	-20° C a 90° C
Acabado	aluminio RAL 9010
Dimensiones (mm)	165 Ø x 110
Orificio para empotrar (mm)	141 ~ 147 Ø
Montaje	abrazaderas de resorte
Peso	0,9 kg

Dimensiones

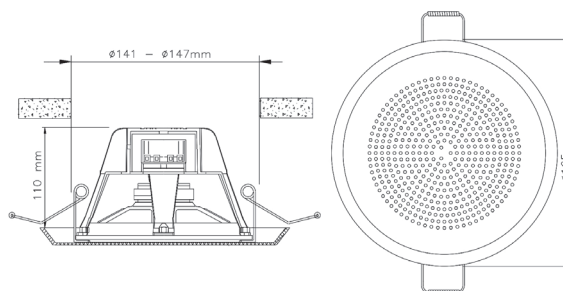

LOUDSPEAKERS



Ceiling speaker for clean rooms

BK-560CR » 6 W · 8 Ω

High-quality ceiling speaker specially designed for clean rooms, featuring a 5" driver, 6 W of power and 8 ohm connection. It is recessed into the ceiling using a quick-installation spring clamp system. It serves as a general-purpose sound point for any type of installation, although its design (materials, construction, robustness, etc.) makes it particularly suitable for clean rooms—such as microelectronics production environments, the pharmaceutical industry, photographic studios, laboratories, and more.



Technical specifications

RMS power	6 W
Impedance	8 Ω
Frequency response	70 ~ 12,000 Hz
SPL @ 1 m, 1 kHz	88 dB (1 W) / 95 dB (6 W)
Dispersion (-6 dB)	150° (1 kHz) / 70° (4 kHz)
Operating temperature	-20° C to 90° C
Finish	RAL 9010 aluminum
Dimensions (mm)	165 Ø x 110
Mounting hole (mm)	141 ~ 147 Ø
Mounting	Spring clamps
Weight	0.9 kg

Dimensions

