

Altavoz de superficie

SAFE-561-54T » 6 W · EN54


Altavoz de superficie de 6 W en línea 100 V y tomas para 6, 3, 1,5 y 0,5 W, con certificado EN 54-24. Con terminales cerámicos, cuerpo de aluminio y rejilla metálica, grado de protección IP32c, para montaje en pared o techo. Además de los usos habituales de los altavoces de techo en todo tipo de instalaciones sus certificados permiten utilizar este modelo en sistemas de megafonía y alarma por voz que deban cumplir la normativa EN 54.



Especificaciones técnicas

Potencia RMS	6 W
Selección de potencia	6, 3, 1,5 y 0,5 W
Respuesta en frecuencia	170 ~ 13.000 Hz
SPL 4 m, 1 kHz	76 dB (1 W) / 84 dB (6 W)
SPL 1 m, 1 kHz	88 dB (1 W) / 96 dB (6 W)
Temperatura de trabajo	-20° C a 90° C
Grado de protección	IP 21C / 32C
Acabado	acero y aluminio RAL 9010
Dimensiones (mm)	169 Ø x 65
Montaje	4 x tornillo
Peso	1,2 kg

Dimensiones

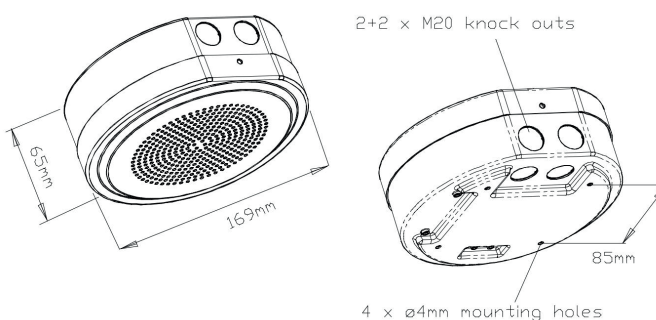

Modelos para ambientes marinos y offshore

Disponibles versiones certificadas (Wheelmark / MED y normativas OMI/SOLAS), diseñadas para garantizar la máxima durabilidad y rendimiento en condiciones salinas y extremas. Consulte con nosotros para conocer los modelos disponibles.

LOUDSPEAKERS

Surface speaker



SAFE-561-54T » 6 W · EN54


6 W surface-mount speaker for 100 V line with power taps of 6, 3, 1.5, and 0.5 W, EN 54-24 certified. Features ceramic terminals, an aluminum body, a metal grille, an IP32C protection rating, and is suitable for wall or ceiling mounting. In addition to standard applications across all types of installations, its certifications allow for integration into public address and voice alarm systems required to comply with the EN 54 standard.




Technical specifications

RMS power	6 W
Power taps	6, 3, 1.5 and 0.5 W
Frequency response	170 ~ 13,000 Hz
SPL @ 4 m, 1 kHz	76 dB (1 W) / 84 dB (6 W)
SPL @ 1 m, 1 kHz	88 dB (1 W) / 96 dB (6 W)
Operating temperature	-20° C to 90° C
IP rating	IP 21C / 32C
Finish	RAL 9010 steel and aluminum
Dimensions (mm)	169 Ø x 65
Mounting	4 x screws
Weight	1.2 kg

Dimensions



2+2 x M20 knock outs



4 x Ø4mm mounting holes



Models for marine and offshore environments

Certified versions available (Wheelmark / MED and IMO/SOLAS standards), designed to ensure maximum durability and performance in saline and extreme conditions. Please contact us to learn more about the available models.