

Contact us to configure the system with all the necessary elements



## Example

Restaurant, bar, taver, inn...

400 m2


Music distribution

Local attenuation



MAV-120Z6

2 x 2,5 mm<sup>2</sup>

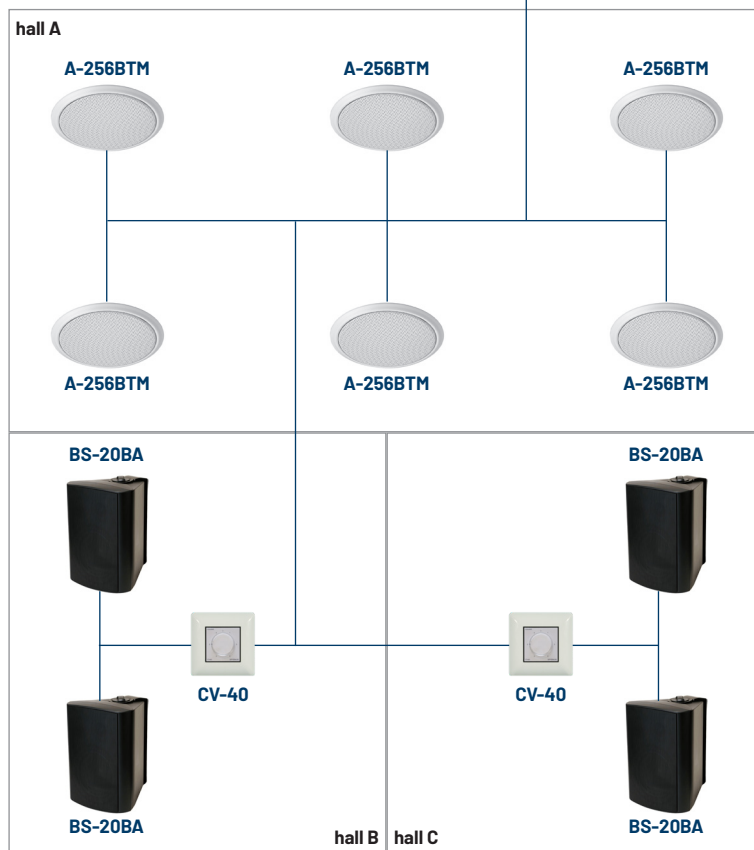

## Local attenuation

In PA systems attenuators are used to reduce or cancel the volume of the music program.

Depending on the power of the speakers they control, one of the following models will be chosen:

**CV-4** Up to 4 W of power

**CV-12** Up to 12 W of power

**CV-40** Up to 40 W of power

**CV-60** Up to 60 W of power



All models are available in four colors (white, ivory, black and silver), as well as trim frames.

## Power calculation

Approximate area 400 m<sup>2</sup>

Hall A (200 m<sup>2</sup>): 6 x ceiling speakers connected to 3 W

Hall B (100 m<sup>2</sup>): 2 x two-way speakers connected to 20 W

Hall C (100 m<sup>2</sup>): 2 x two-way speakers connected to 20 W

**TOTAL:** 6 x 3 + 4 x 20 = 98 W

## LIST OF EQUIPMENT

quantity	model	description
1	MAV-120Z6	Amplifier 240 W, 100 V, zones, sound source
6	A-256BTM	Ceiling speaker 6 W, 100 V
2	BS-20BA	Two-way speaker 20 W, 100 V
2	CV-40I	Attenuator 40 W, 100 V
2	M-420B	Frame for attenuator